

CLD LockMaster SR3

Emergency Exit Gate to LPS 1175 SR3 Issue 7



Minimum Delay of 5 minutes against attack

CLD LockMaster SR3 Panic Out gate was the first emergency exit gate in the world rated SR3. Designed to be used in the most secure locations, gates are protected by CLD Securus mesh and vertical bars, ensuring resistance against even the most determined attackers.

Rigorously tested by the Loss Prevention Certification Board (LPCB) to guarantee a minimum delay of 5 minutes against attack, LockMaster SR3 Panic Out also has Secured by Design accredited, making it a police preferred specification for security.

Ideal for

- Nuclear
- Data Centres
- Utilities
- Government Sites

Conforms to




Key Features

High Security Emergency Exit Gate

Single Leaf

Outwards Opening

Isometric View

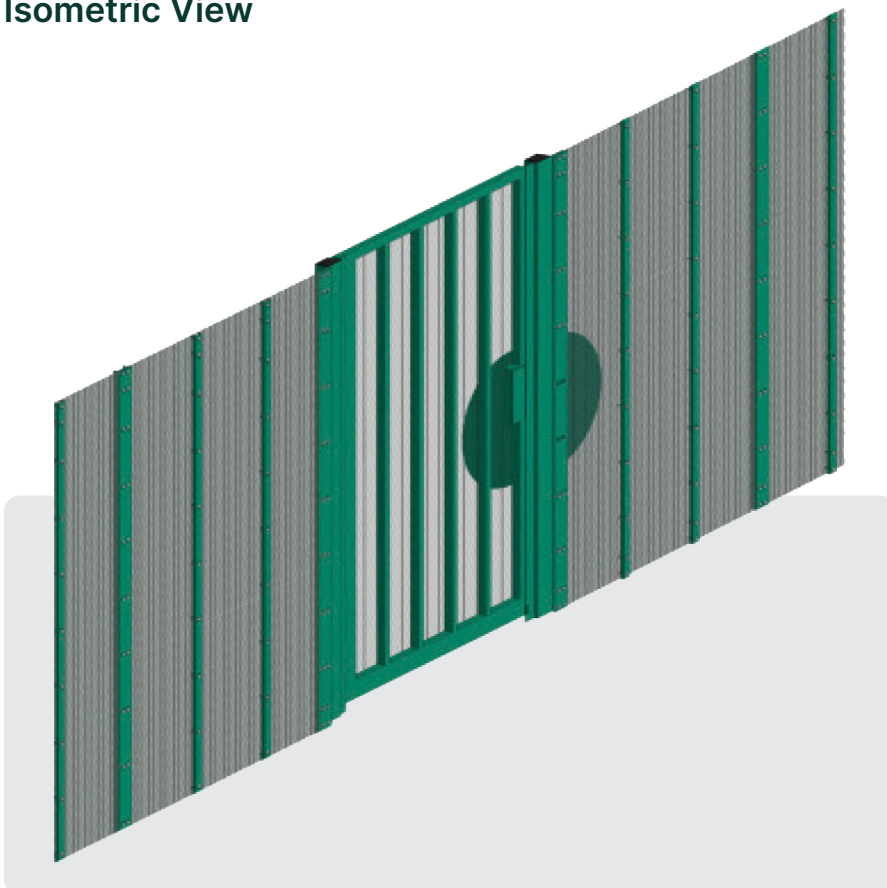

Scan the QR code to find out more



CLD LockMaster SR3

Emergency Exit Gate to LPS 1175 SR3 Issue 7



Product Technical Information

Standards:	LPS 1175 SR3 Issue 7 BS1722-14: 2017 Secured by Design - Police Preferred Specification
Description:	Mesh steel high security gate system with mesh infill
Configuration:	Single leaf opening outwards only
Height:	2350mm (can have lintel to match fence line)
Nominal height:	2.4m
Width:	1480mm
Gate Frame:	100 × 50mm steel frame all welded and drilled prior to hot dip Galvanised and powder-coated to match fencing
Infill Panels:	CLD Securus mesh fixed with non-removable security fixings
Locking:	MICO Abryll Range of single point lock, surface fitted with Panic & Emergency. MICO external locking attachment cylinder guards USCH3
Posts:	RHS or SHS, depending on application – please contact CLD Fencing Systems for full details - galvanised after manufacture and polyester powder-coated to match fencing
Hinges:	3 x hinge sets with min M20 eye bolts
Finish:	Polyester powder-coated to minimum 60 microns. Any RAL colour
Fixings:	Depending on application – please contact CLD Fencing Systems for full details.
Post dimensions:	80mm x 80mm Welded frame with 80 × 6mm flanges for fixing fencing
Foundations:	Set posts in holes 450mm square x 950mm deep min. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions
Warranty	Minimum of 15 years against manufacturing defects.

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - 20221115_CLD_LockMaster_SR3_Panic_Out_DS

CALL 01270 764751 VISIT WWW.CLD-SYSTEMS.COM