

# CLD Screenogrill

Louved Fence Panel System



Bsi Made in Britain

Designed to limit the visibility of premises whilst preventing intrusion, CLD Screenogrill system offers 2 different screening levels – 80% or 100%.

Available in a range of different height options, CLD Screenogrill offers a modular approach for wherever screening is required.

For full technical information see overleaf.


## Ideal for

- Hospitals
- Commercial Developments
- Carparks
- Any screening application

## Conforms to



## Isometric View

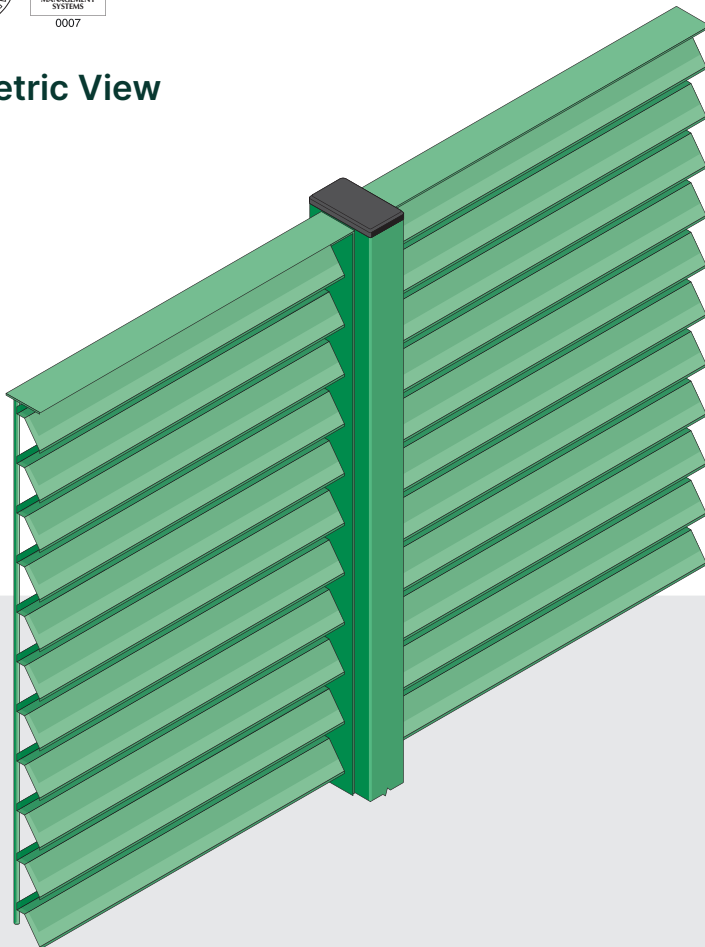

## Key Features

2 Screening level options

Contemporary louvred effect

Modular system

Limits scalability

Scan the QR code to find out more



## Product Technical Information

<b>Standards:</b>	BS1722-14:2017 BS EN ISO 1461:2009 BS EN 13438:2013
<b>Panel Type:</b>	Louvre panels consisting of louvred profiled flat bars, electrofused to 4mm horizontal wires at 46mm vertically and 132mm horizontally. Panel edges flat bars 50mm x 3mm. Galvanised and polyester powder-coated to a minimum of 60 microns. 2 vision options available – select as required: 80/20 vision using 50mm x 1.5mm louvred fin 100/0 vision using 69mm x 1.5mm louvred fin
<b>Panel Widths:</b>	1642mm or 1992mm
<b>Wire Diameter:</b>	4mm
<b>Mesh Size:</b>	n/a
<b>Height:</b>	80/20 vision: 954mm/1596mm/1963mm or any combination of these heights 100/0 vision: 967mm, 1608mm/1975mm or any combination of these heights Panels can be modified to suit non standard heights if required
<b>Nominal height:</b>	1.0, 1.6m, 2.0m
<b>Finish:</b>	Polyester powder-coated to minimum 60 microns. Any RAL colour
<b>Top Edge Projection:</b>	Nil - flush
<b>Panel Installation</b>	Bottom of panel 40mm above ground or as required
<b>Security topping:</b>	n/a
<b>Posts:</b>	RHS or SHS, depending on application – please contact CLD Fencing Systems for full details - galvanised after manufacture and polyester powder-coated to match fencing
<b>Post dimensions:</b>	Depending upon application. Please contact CLD Systems.
<b>Post centres:</b>	Post centres vary dependant on post section
<b>Fixings:</b>	Depending on application – please contact CLD Fencing Systems for full details.
<b>Foundations:</b>	Set posts in holes 300mm diameter x 800mm deep (adjust according to fence height), filled not less than half the depth with concrete. Note: contractor/ client is responsible for the foundation size suitable for the ground conditions
<b>Warranty</b>	Minimum of 15 years against manufacturing defects.

## Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - 20221214\_CLD\_Screenogrill\_DS