

CLD Dulok


Mesh and double wire flat panel system



Find out more
Scan for more information

Description

CLD Dulok is a highly versatile mesh fencing system, which offers an aesthetic and cost-effective solution where visibility is required. Dulok features twin horizontal wires either side of the vertical wire. It is available in 2 different options 6mm verticals and twin 8mm horizontals or 5mm verticals and twin 6mm horizontals. (traditionally known as 868 and 656). A wide range of heights and security rated versions are available.

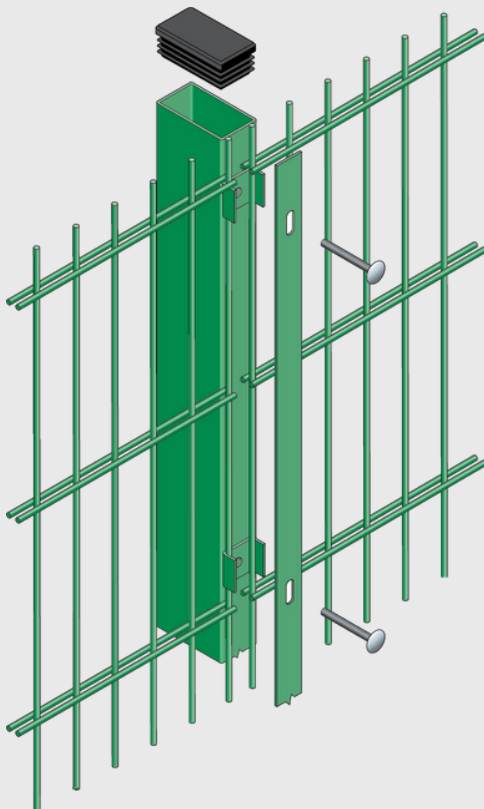

Features

Ideal for: Schools, Zoos
and Wildlife Parks,
Sports facilities.

Anti-cut through, double wire
panels

Wide range of height options

Full range of RAL colours
available


Exploded view of post and fixing details for the CLD Dulok
This product has additional features not demonstrated for security reasons



Product Technical Information

| | |
|--------------------------|---|
| Standard | BS1722-14: 2017 BS EN ISO 1461:2009 BS EN 13438:2013 |
| Panel Type | Mesh and wire. Single vertical and double horizontal wires. Note: Dulok Sports Rebound system panel type also available. |
| Panel Width | 2506mm |
| Wire diameter | 6mm verticals and twin 8mm horizontals or 5mm verticals and twin 6mm horizontals. |
| Mesh size | 200 x 50mm |
| Available heights | 630mm to 6060mm. Fence heights above 3030mm are made up of 2 or more panels. |
| Nominal Heights | 0.6 to 6.0m |
| Finish | Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available |
| Top Edge Projection | 30mm |
| Panel Installation | Bottom of panel approx 40mm above ground |
| Security Topping Options | Cranked or straight extensions for barbed and razor wire depending on height of panel |
| Post Dimensions | 60mm x 40mm to 120mm x 60mm depending on height of panel |
| Post Centres | 2520mm |
| Posts | RHS, galvanised after manufacture and polyester powder-coated to match fencing |
| Fixings | 40mm x 5mm full length clamp bar. M8 x 40mm stainless steel pin hex dome-head security screws. Sheardrive™ if required instead of pin hex. |
| Foundations | Set posts in holes minimum 300mm diameter x 800mm deep. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions and height of fence. |
| Warranty | Minimum of 15 years against manufacturing defects. |

System Details

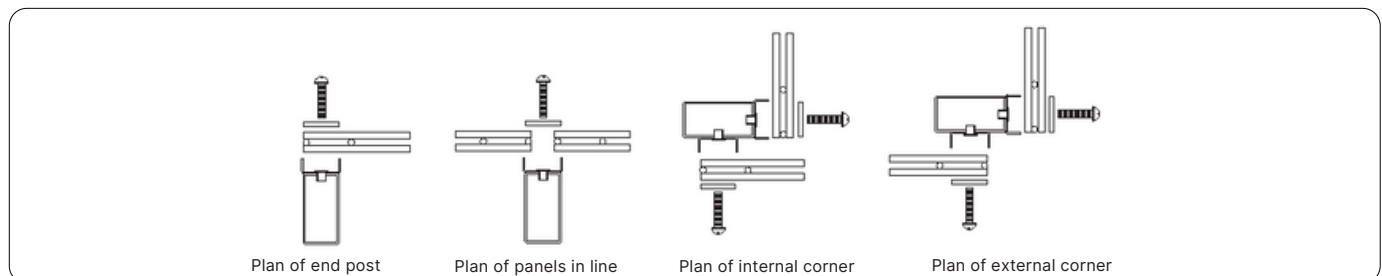

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_Dulok_DS_20230216