

CLD Dulok Sport Rebound

Double wire rebound panel system for sports/MUGA areas




Physical Security Systems



Find out more
Scan for more information

Description

CLD Dulok Sports Rebound offers built in rebound ability without the need for separate panels or a compromise on security. With both full or partial options, Dulok Sports Rebound can be paired with the Dulok double wire system to create an aesthetically pleasing low maintenance sports perimeter. Typical arenas for this system are Multi Use Games Areas (MUGA), Tennis Courts, Professional sports complexes & Schools.

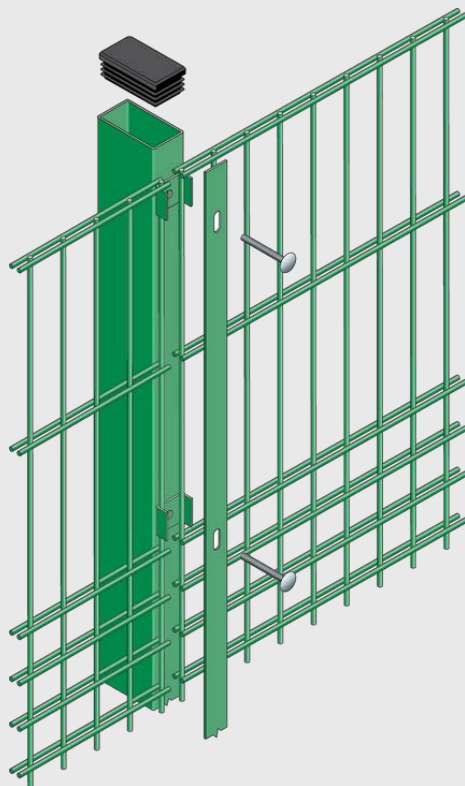

Features

Extra wires provide greater strength

Wide range of height options

Excellent rebound properties

Full range of RAL colours available

Exploded view of post and fixing details for the CLD Dulok Sport Rebound
This product has additional features not demonstrated for security reasons



cld-systems.com

CLD Dulok Sport Rebound


Double wire rebound panel system for sports/MUGA areas



Product Technical Information

Standard	BS1722-14: 2017 BS EN ISO 1461:2009 BS EN 13438:2013
Panel Type	Mesh and wire. Single vertical and double horizontal wires.
Panel Width	2506mm
Wire diameter	6mm verticals and twin 8mm horizontals
Mesh size	66.5 x 50mm
Available heights	1230mm to 2030mm as full rebound panels. 3030mm to 6060mm as combination of rebound and Dulok standard panels heights.
Nominal Heights	1.2 to 6m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Top Edge Projection	30mm on one side
Panel Installation	Bottom of panel approx 40mm above ground
Post	RHS, galvanised after manufacture and polyester powder-coated to match fencing
Post Dimensions	Minimum 60mm x 40mm depending on height of panel
Maximum post Centres	2520mm
Fixings	40mm x 5mm full length clamp bar. M8 x 40mm stainless steel pin hex dome-head security screws. Sheardrive™ if required instead of pin hex. Rubber grommets available for noise reduction.
Foundations	Set posts in holes minimum 300mm diameter x 800mm deep (depending on fence height) Contractor/ client is responsible for the foundation size suitable for the ground conditions
Warranty	Minimum of 15 years against manufacturing defects.

System Details

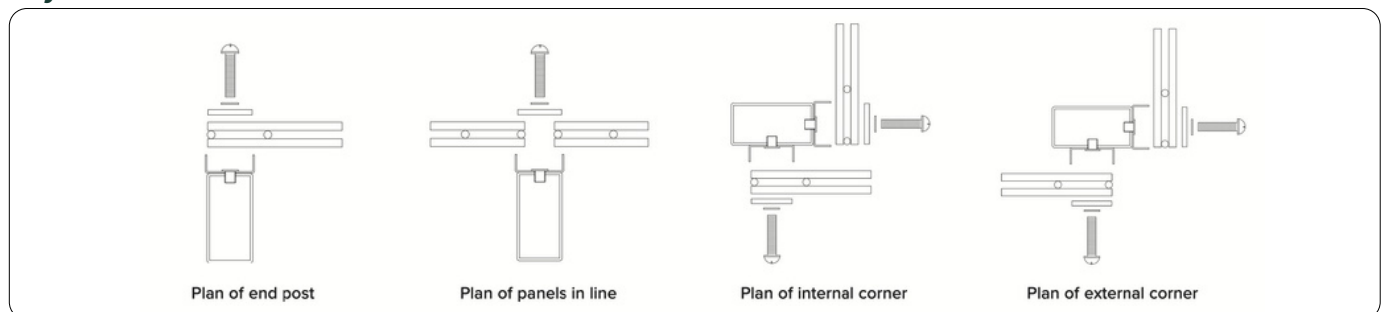

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_Dulok_Sport_Rebound_DS_20230614