

CLD FenceSafe LockMaster

Double and single leaf permanent grade swing gates, in an on-ground format



Physical Security Systems



Find out more
Scan for more information

Description

CLD FenceSafe LockMaster gates offers a permanent grade solution in an on-ground format. The gate is supplied complete with infills to match the security of the fenceline and is installed using CLD's innovative FenceSafe 100% recycled bases or kentledge blocks. All CLD's temporary gates can be converted to permanent access control solutions. FenceSafe LockMaster gates are available to suit site specific needs, including various locking methods and additional security toppings.


Features

Wind-rated to BS EN 1991

Zero Ground strike

Can be repurposed for permanent fenceline on site completion

Hire or purchase options available

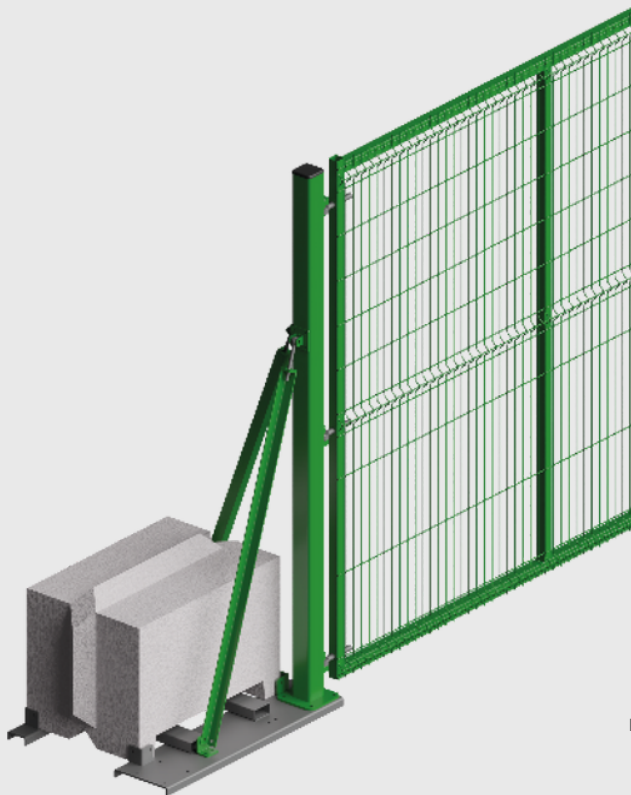

Exploded view of post and fixing details for the CLD FenceSafe LockMaster
This product has additional features not demonstrated for security reasons



cld-systems.com

CLD FenceSafe LockMaster

Double and single leaf permanent grade swing gates, in an on-ground format

Product Technical Information

Standard	BS1722-14:2017 BS EN ISO 141:2009 BS EN 13438:2013
Description	Open mesh steel security gate with mesh infill, to match fencing installed using CLD FenceSafe Base or kentledge blocks.
Infill Options	Options to be chosen from the CLD range of mesh fencing panels to match fenceline.
Width	Range of widths to suit customer requirements
Available Heights	Range of heights to suit customer requirements.
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Post Dimensions	80mm x 80mm minimum
Fixings	Depends on mesh panel type. See relevant Q40 for details.
Foundations	Installed using CLD FenceSafe Base and platform with 200kg of ballast or concrete (kentledge) block subject to size. System to be designed in accordance with BS6399-2 or BS EN 1991 for area of use.
Configuration	Double leaf/ single leaf / rear hung, front hung or centre hung as required
Gate Frame	To suit mesh infill panels: Vertical stiles: minimum of 50mm x 50mm SHS Horizontal rails: minimum of 50mm x 50mm SHS Manufactured to order, galvanised and powder-coated to match fencing
Locking	To client specification
Hinges	Minimum of 3 x welded hinge sets with M20 (minimum) eye bolts
Warranty	Minimum of 15 years against manufacturing defects.
Notes	All dimensions are nominal, for further information please contact CLD Fencing Systems. Information is correct at time of production. As part of our policy of continuous improvement, we reserve the right to alter product specification without notice.

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_FenceSafe_LockMaster_DS_20230720