

# CLD FenceSafe SlideMaster

Permanent grade cantilever gates, in an on-ground format



Physical Security Systems



Find out more  
Scan for more information

## Description

CLD FenceSafe SlideMaster sliding gates offer a permanent grade in a temporary installation. The gates are supplied complete with infills to match the Securus 358 fenceline. All CLD's temporary gates can be redeployed as the site perimeter changes and even converted to permanent access control solutions upon completion. FenceSafe SlideMaster gates are available to suit site specific needs, including various heights and widths, locking methods and additional security toppings.


## Features

Wind-rated to BS EN 1991

Zero ground strike

Rapid deployment

Hire or purchase options available

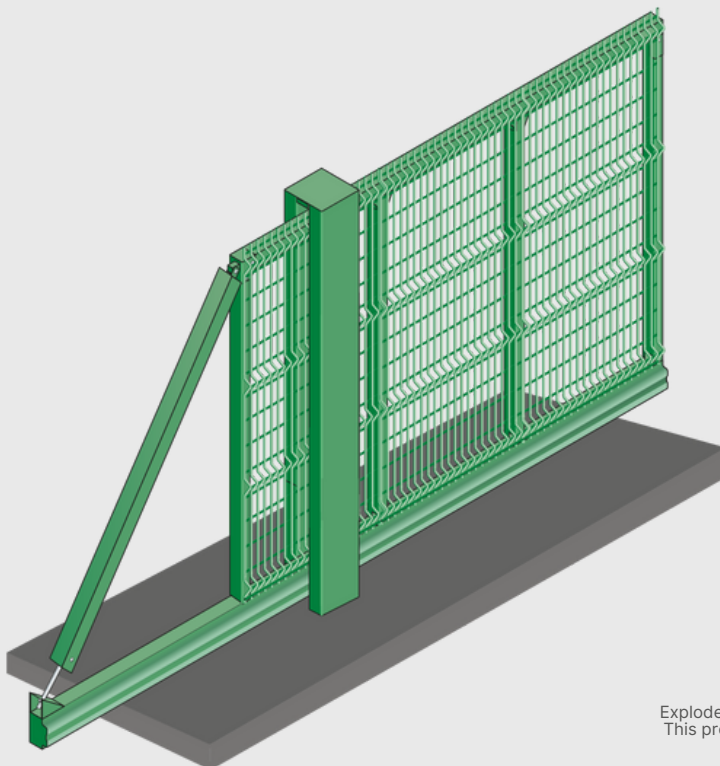

Exploded view of post and fixing details for the CLD FenceSafe SlideMaster  
This product has additional features not demonstrated for security reasons



cld-systems.com

# CLD FenceSafe SlideMaster

Permanent grade cantilever gates, in an on-ground format

## Product Technical Information

Standard	BS1722-14:2017
Description	Open mesh aluminium security gate system with steel mesh infill, installed with an on ground purpose-made base.
Infill Options	Options to be chosen from the CLD range of mesh fencing panels to match fenceline. See mesh type Q40 for more information.
Width	Single leaf opening size from 2000mm to 6000mm Double leaf opening size from 4000mm to 12000mm
Available Heights	Various heights available to suit customer requirements. Please contact CLD for more information.
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Fixings	Main tower, park post and support rollers to be fixed to a temporary moveable base.
Foundations	Installed using a steel base with concrete ballast to suit gate width.
Configuration	Single leaf sliding to left or right or double leaf
Gate Frame	Gate consists of main aluminium upright tower. Main gate frame supported on custom made cantilever beam. Frame constructed from 75x75mm Aluminium box with mesh infill as above.
Locking	Manual locking options available
Warranty	Minimum of 15 years against manufacturing defects.
Notes	All dimensions are nominal, for further information please contact CLD Fencing Systems. Information is correct at time of production. As part of our policy of continuous improvement, we reserve the right to alter product specification without notice.

## Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD\_FenceSafe\_SlideMaster\_DS\_20230724