

# CLD HoardSafe

Site hoarding system




## Description

HoardSafe is CLD's range of sustainable and secure hoarding. Manufactured from composite recycled plastic panels which click easily into place and are installed on steel rails. The system can be fixed to blocks or ground buried. CLD's range of permanent fencing can easily be installed after the hoarding is removed, using the existing posts. HoardSafe can be vinyl wrapped with custom designs and re-used multiple times. The system is ideal for Construction Sites and Protecting people in open spaces, among others.



Find out more  
Scan for more information

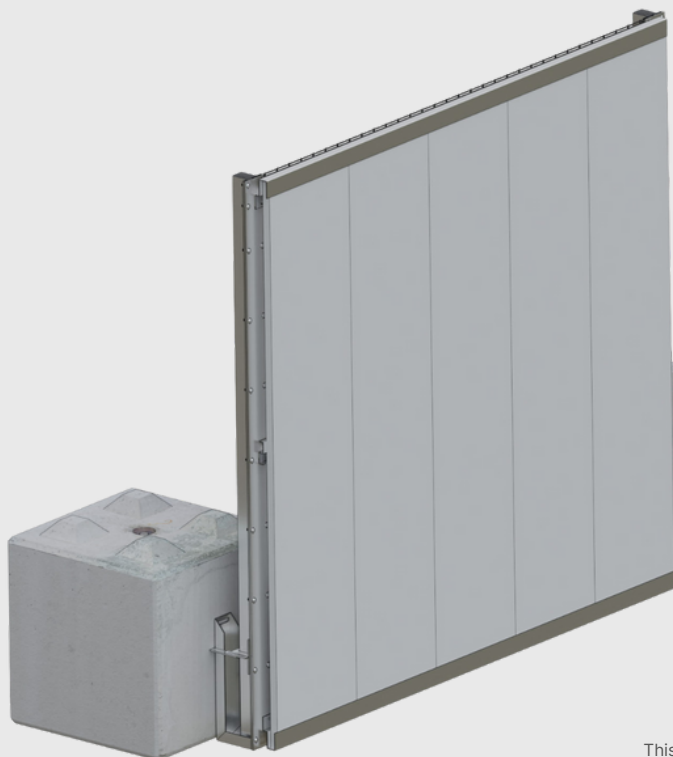

## Features

Sustainable alternative to standard site hoarding

Easily updates to a permanent fenceline

BS EN 1991 wind loading tested to in excess of 100 mph

Dug in or surface mounted foundation options

Exploded view of post and fixing details for the CLD HoardSafe  
This product has additional features not demonstrated for security reasons



# CLD HoardSafe

Site hoarding system

## Product Technical Information

<b>Standard</b>	BS EN ISO 1461:2009 BS EN 13438:2013 BS EN 1991 Wind Loading TWf2012:01 Temporary Works Forum
<b>Panel Type</b>	35mm thick recycled PVC board, 500mm wide panels, height to suit
<b>Panel Width</b>	500mm minimum
<b>Fixings</b>	M8 cup square bolt with washer & hex nut
<b>Available Heights</b>	To suit site requirements
<b>Finish</b>	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
<b>Top Edge Projection</b>	-
<b>Panel installation</b>	Bottom rail to follow ground level
<b>Topping Options</b>	Options such as anti-climb available on request
<b>Posts</b>	Special flanged post, galvanised after manufacture
<b>Post Dimensions</b>	80mm x 60mm
<b>Post Centres</b>	2520mm
<b>Foundations</b>	Post fixed to kentledge block using 4 way adjustable bracket. Ground bury option. Can also be dug in. Set posts in holes minimum of 450mm square x 800mm deep. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions and height of fence.
<b>Warranty</b>	Covers CLD mesh & steel: Minimum of 15 years against manufacturing defects

## Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD\_HoardSafe\_DS\_20230719