

CLD LockMaster Go

Fast Turnaround Gates



Physical Security Systems



Find out more
Scan for more information

Description

CLD's LockMaster Go gates are designed to reduce lead times on mesh gate systems. Our standard RAL 6005 green gate can be assembled and supplied within 2 weeks, which is perfect for projects that require a quick turnaround. Our gates are available in 4 different mesh options: Eclipse, Exempla, MultiPlus & Securus. We also offer other RAL colors on a 3-week lead-time. This system is ideal for applications such as schools, Parks & Gardens, Warehousing and Housing.


Features

Available in four different mesh options

Double or single leaf options

Front, rear or centre hung.

Wide range of RAL colours available.

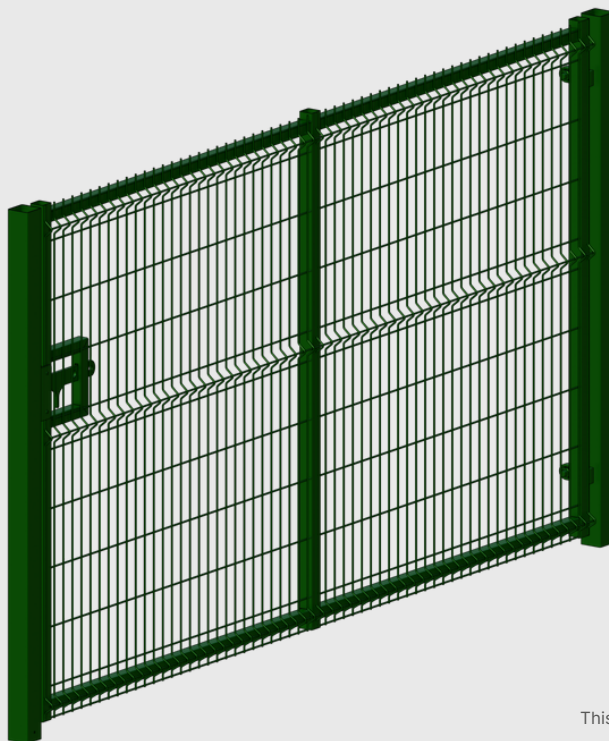

Exploded view of post and fixing details for the CLD LockMaster Go
This product has additional features not demonstrated for security reasons



cld-systems.com

CLD LockMaster Go

Fast Turnaround Gates

Product Technical Information

Standard	BS1722-14:2017
Description	Open mesh steel security gate system with mesh infill, to match fencing
Panel Options	Options to be chosen from the following CLD mesh fencing panels CLD Eclipse, CLD Exempla, CLD MultiPlus, CLD Securus – note, when clad with Securus panels, mesh will oversail the frame to match fence system
Panel Width	For Eclipse, Exempla and MultiPlus panels: Single leaf: 500mm minimum to 3000 maximum Double leaf: 1000mm to 6000mm maximum For Securus panels: Single leaf: 500mm up to 2000mm Double leaf: 1000mm up to 4000mm
Available Heights	1730mm, 1930mm and 2330mm to match fence panels
Nominal Heights	1.8m, 2.0 and 2.4m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Post Dimensions	For Eclipse, Exempla and MultiPlus panels: Up to 1.2m wide - 80mm x 80mm 1.2m to 2.0m wide – 100mm x 100mm 2.0m to 3.0m wide – 120mm x 120mm For Securus panels: Up to 1.0m wide - 80mm x 80mm 1.0m to 1.8m wide – 100mm x 100mm 1.8m to 2.0m wide – 120mm x 120mm
Fixings	Dependant on mesh panel type
Foundations	Set posts in holes 450mm square x 950mm deep min. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions
Configuration	Double leaf/ single leaf / rear, front or centre hung as required
Gate Frame	Vertical stiles: minimum of 50mm x 50mm x 2mm SHS Horizontal rails: minimum of 40mm x 40mm x 2mm SHS
Locking	Slide bar or Locinox range of Q40 locking options
Hinges	2 x CLD hinge sets with M20 eye bolts and 1 x safety cable
Warranty	Minimum of 15 years against manufacturing defects.
Notes	All dimensions are nominal, for further information please contact CLD Fencing Systems. Information is correct at time of production. As part of our policy of continuous improvement, we reserve the right to alter product specification without notice.

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_LockMaster_Go_DS_20230724