

CLD Screenogrill


Louvred Fence Panel System



Description

CLD Screenogrill is designed to limit the visibility of premises whilst preventing intrusion, offering 2 different screening levels – 80% or 100%. Available in a range of different height options, CLD Screenogrill offers a modular approach for wherever screening is required. This system is perfect for applications such as hospitals, commercial developments, car parks or any screening application

Find out more
Scan for more information

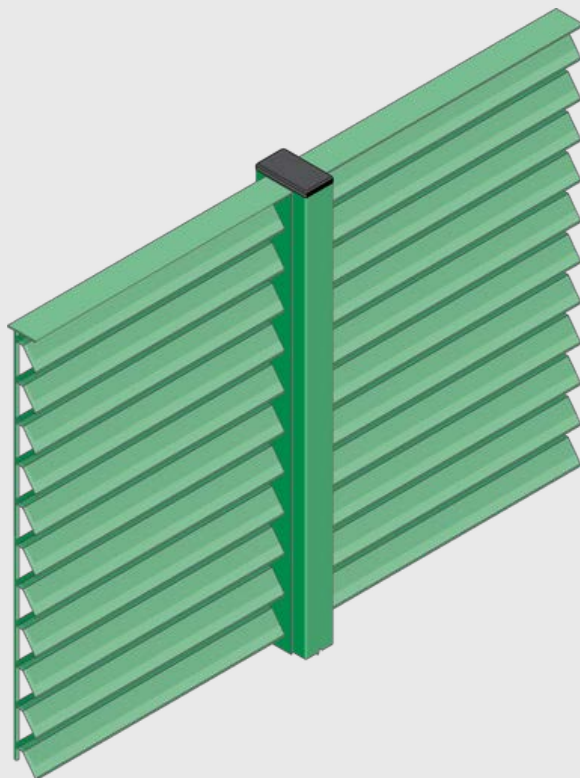

Features

2 Screening level options

Contemporary louvred effect

Modular system

Exploded view of post and fixing details for the CLD Screenogrill
This product has additional features not demonstrated for security reasons

CLD Screenogril

Louvred Fence Panel System

Product Technical Information

Standard	BS1722-14: 2017 BS EN ISO 1461:2009 BS EN 13438:2013
Panel Type	Louvre panels consisting of triple flanged louvres, electrofused to 4mm horizontal wires at 46mm vertically and 132mm horizontally. Top and bottom flat bars 50mm x 3mm. 2 vision options available – select as required: 80/20 vision using 50mm x 1.5mm fin louvres 100/0 vision using 69mm x 1.5mm fin louvres
Panel Width	1992mm
Wire Diameter	4mm
Fixings	Depending on application – please contact CLD Fencing Systems for full details.
Available Heights	80/20 vision: 954mm/1596mm/1963mm or any combination of these heights. 100/0 vision: 967mm/1608mm/1975mm or any combination of these heights.
Nominal Heights	1.0m, 1.6m, 2.0m – panels can be modified to bespoke heights if required.
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Topping options	N/A
Top edge projection:	N/A
Panel installation	Bottom of panel approx 40mm above ground
Posts	RHS or SHS, depending on application galvanised after manufacture and polyester powder-coated to match fencing
Post Dimensions	Depending upon application
Post Centres	Depending on post section
Foundations	Set posts in holes 300mm diameter x 800mm deep (adjust according to fence height), filled not less than half the depth with concrete. Note: contractor/ client is responsible for the foundation size suitable for the ground conditions
Warranty	Minimum of 15 years against manufacturing defects

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_Screenogril_DS_20230615