

CLD Secureogrill


Rigid Grill Fencing System



Description

CLD Secureogrill offers the ideal solution for a perimeter to match modern urban landscapes. Offering excellent visibility, these panels are both hard wearing and aesthetically pleasing. Secureogrill will complement any residential or commercial site. The Secureogrill system is ideal for a wide array of applications such as commercial buildings, housing estates or modern industrial sites.

Find out more
Scan for more information

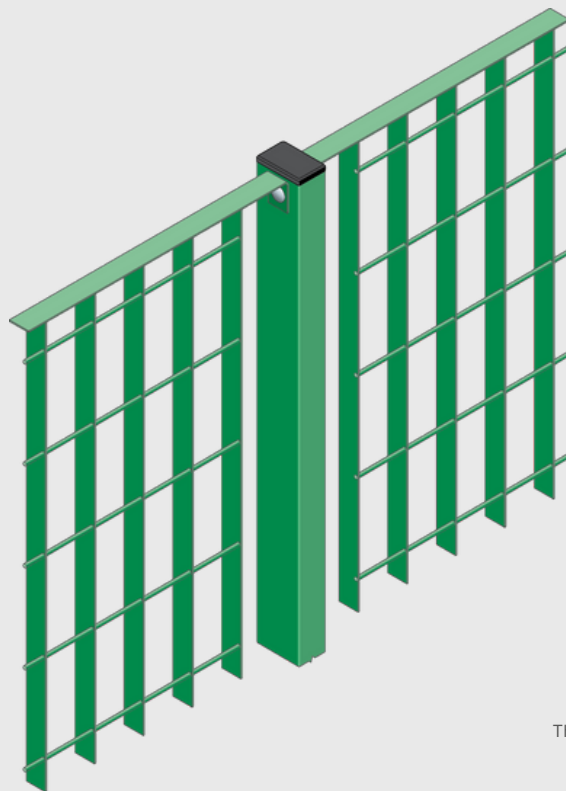

Features

Open mesh fencing

Cost effective

Excellent visibility

Exploded view of post and fixing details for the CLD Secureogrill
This product has additional features not demonstrated for security reasons

CLD Secureogril

Rigid Grill Fencing System

Product Technical Information

Standard	BS1722-14:2017 BS EN ISO 141:2009 BS EN 13438:2013
Panel Type	Electrofused steel grating consisting of vertical flat bars with horizontal wires. Top and bottom flat bars.
Panel Width	1992mm
Wire Diameter	25mm x 2mm vertical flat bars, 4.5mm horizontal wires. Tops and bottoms 25mm x 4mm flat bars. 25mm x 3mm vertical flat bar option available.
Mesh size	Vertical flat bars at 62mm spacing and horizontal wires at 132mm spacing.
Fixings	Depending on application – please contact CLD Fencing Systems for full details.
Available Heights	930mm, 1194mm, 1326mm, 1458mm, 1722mm, 1986mm, 2118mm or 2514mm (fencing can be made up of any combination of these sizes)
Nominal Heights	1.0, 1.2m, 1.4m, 1.5m, 1.8m, 2.0m, 2.2m or 2.6m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Panel installation	Bottom of panel approx 40mm above ground
Posts	RHS or SHS, depending on application galvanised after manufacture and polyester powder-coated to match fencing
Post Dimensions	Depending upon application
Post Centres	Depending on post section
Foundations	Set posts in holes 300mm diameter x 800mm deep (adjust according to fence height), filled not less than half the depth with concrete. Note: contractor/ client is responsible for the foundation size suitable for the ground conditions
Warranty	Minimum of 15 years against manufacturing defects.

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_Secureogril_20230720