

CLD Securus S2


High security fencing system to LPS 1175 B3 (SR2) Issue 8



Find out more
Scan for more information

Description

CLD Securus S2 has a reduced installation time compared to Securus AC SR2, due to its off-site assembly of fencing cassettes, with a minimum of a 2 person install. Securus S2 is made up of two layers of rigid mesh, cassettes, fastened together with a full length clamp bar giving sites high levels of security. Tested and certified to LPS 1175 Issue 8 B3 (SR2) it is designed to withstand threats and attacks from a range of tools.

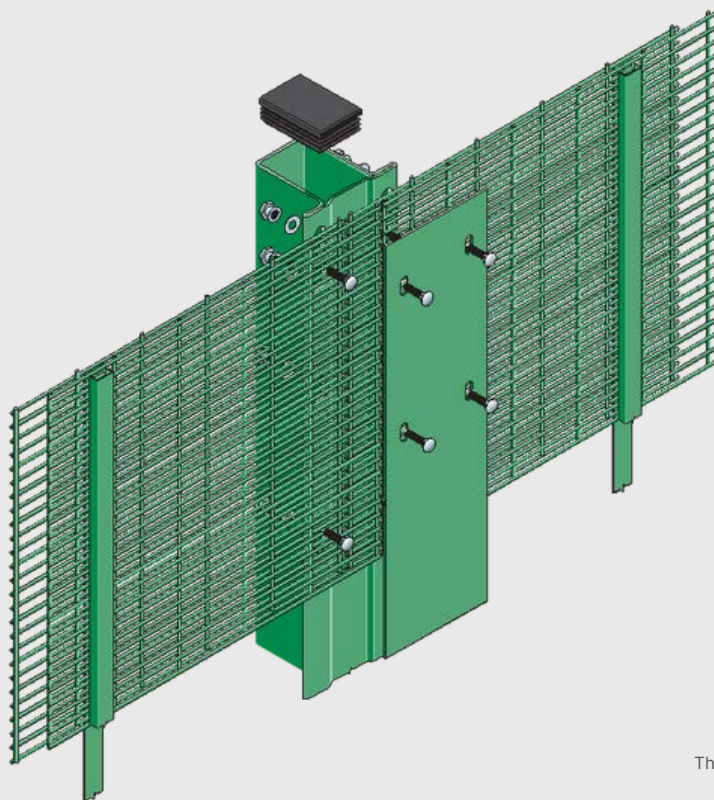

Features

Minimum of 3 minutes
delay against attack

Off-Site assembled fence
panel cassettes

Base plate and ground bury
options available

Ideal for Data Centres, MoD,
Utilities, Ports & Airports

Exploded view of post and fixing details for the CLD Securus S2
This product has additional features not demonstrated for security reasons



cld-systems.com

Securus S2

High security fencing system to LPS 1175 B3 (SR2) Issue 8



Product Technical Information

Standard	LPS 1175 B3(Issue 8) BS1722-14: 2017 BS EN ISO 1461:2009 BS EN 13438:2013 Secured By Design
Panel Type	Double layered mesh cassette system. High aluminium content. (Note: Fence Cassettes are supplied assembled for ease of install, mechanical lifting required – can be supplied unassembled)
Panel Width	2518mm
Wire diameter	4mm verticals
Mesh size	76.2 x 12.5 mm
Available heights	2440mm to 5000mm
Nominal Heights	2.4m to 5.0m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Top Edge Projection	Nil
Panel Installation	Bottom of panel minimum 100mm below ground. Base plated and no ground bury options also available.
Security Topping Options	Barbed and razor wire, cranked and straight
Post Dimensions	80mm x 60mm
Post Centres	2535mm +/- 15mm
Posts	Special flanged post, galvanised after manufacture and polyester powder-coated to match fencing
Fixings	120mm x 6mm full length clamp bar. M8 Stainless Steel cup square bolt (min 30mm)
Foundations	Set posts in holes minimum 450mm square x 950mm deep. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions and fence height.
Warranty	Minimum of 15 years against manufacturing defects.

System Details



Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_Securus_S2_DS_20230223