

CLD Ultimate Extra S1


Security rated profiled panel system to LPS 1175 A1 (SR1) Issue 8



Find out more
Scan for more information

Description

CLD Ultimate Extra is CLD's profiled mesh panel system which has been certified by the Loss Prevention Certification Board to provide a minimum of 60 seconds delay against attack. It also has Secured By Design police preferred specification status confirming its effectiveness in crime prevention.

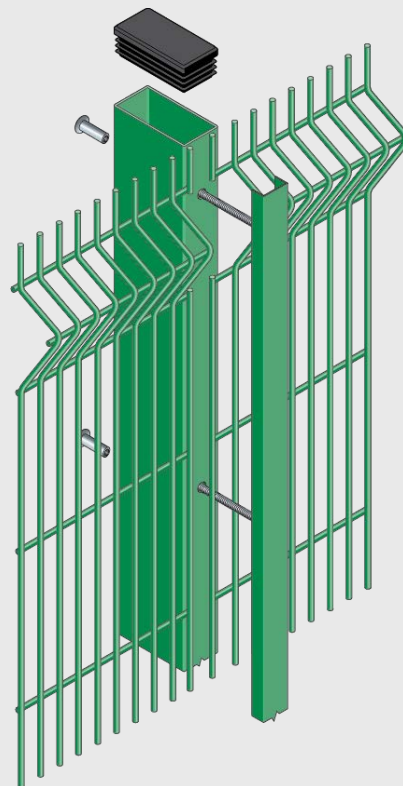

Features

Aesthetic solution

Difficult to climb and cut

Approved by planning authorities

Secured by Design accredited system

Exploded view of post and fixing details for the CLD Ultimate Extra S1
This product has additional features not demonstrated for security reasons



cld-systems.com


CLD Ultimate Extra S1

Security rated profiled panel system to LPS 1175 A1 (SR1) Issue 8

Product Technical Information

Standard	LPS 1175 A1 (SR1) Issue 8 BS1722-14: 2017 BS EN ISO 1461:2009 BS EN 13438:2013 Secured by Design - Police Preferred Specification
Panel Type	Mesh and wire with 4 or 5 profiles as required.
Panel Width	2475mm up to 2435mm and 2050mm at 3030mm high
Wire Diameter	6mm
Mesh size	165 x 25mm
Fixings	41mm x 21mm clamping channel. CLD SafeTFix™ hidden fixing system.
Available Heights	3 profiles: 1835mm. 4 profiles: 2035mm, 2423mm. 5 profiles: 3008mm.
Nominal Heights	1.8m to 3m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Top Edge Projection	25mm
Panel installation	Bottom of panel maximum 50mm above ground
Topping Options	Options available on request
Posts	RHS, galvanised after manufacture and polyester powder-coated to match fencing
Post Dimensions	80mm x 40mm x 2.5mm RHS
Post Centres	2485mm for 2030mm and 2430mm heights. 2060mm for 3030mm height only
Foundations	Set posts in holes 300mm diameter and 800mm deep min. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions
Warranty	Minimum of 15 years against manufacturing defects

System Details

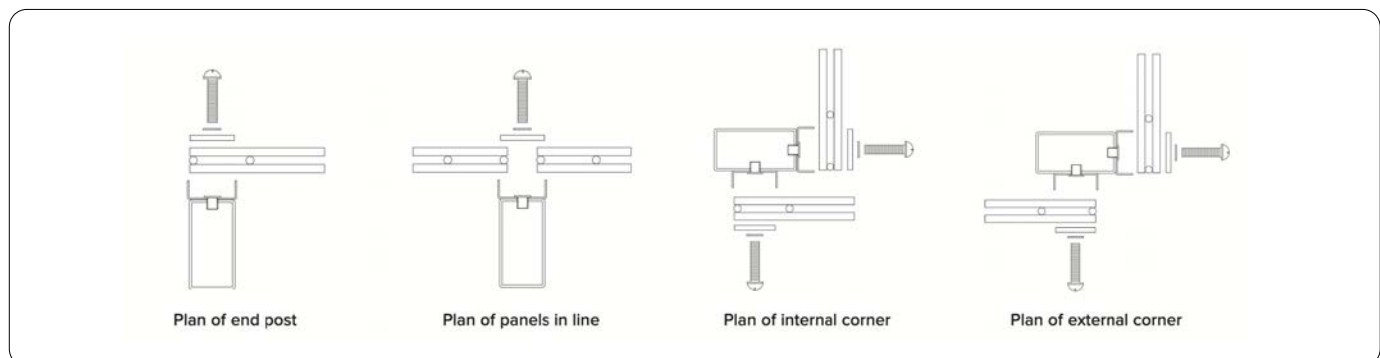

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_Ultimate_Extra_S1_DS_20230615