


# CLD FibreFence Gates

GRP fibreglass gate system



Physical Security Systems

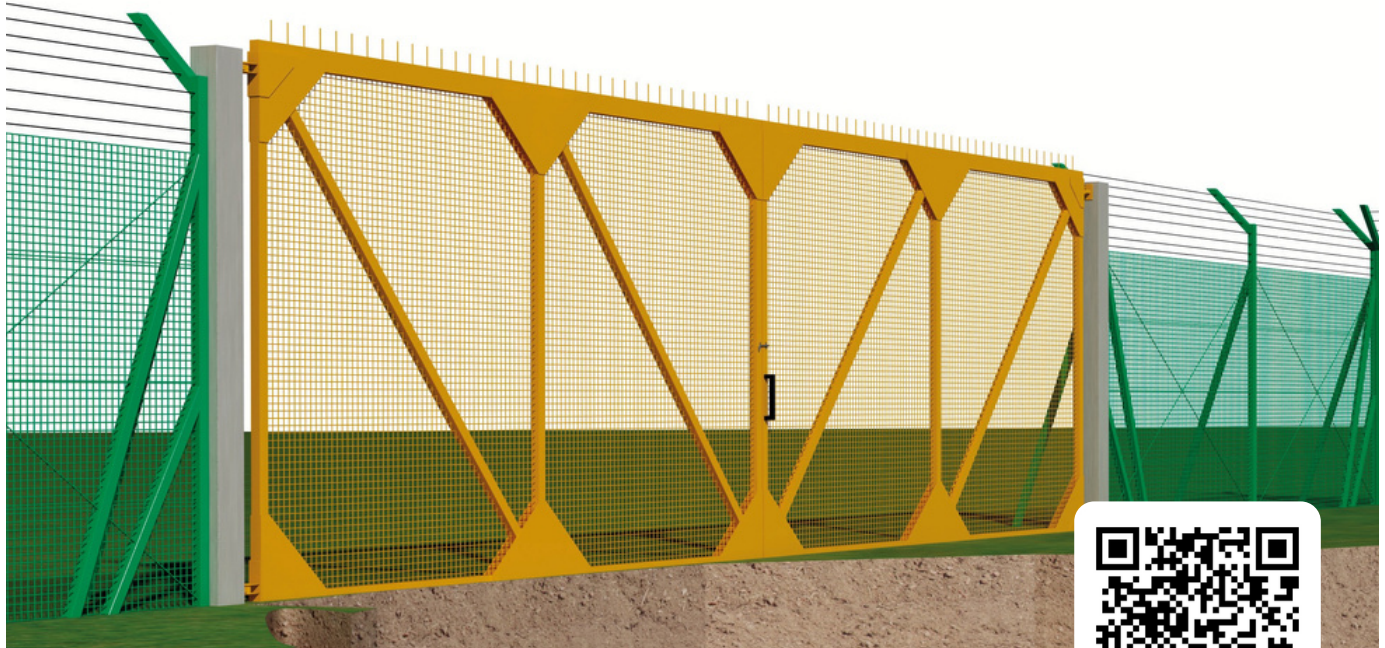

## Description

CLD FibreFence Gates come in mesh, grating and railing panel types to match the existing fencing, and is available in pedestrian and vehicular styles allowing the natural completion of any FibreFence fencing system. They share all GRP's intrinsic benefits, i.e. radio transparency, frangibility, great resistance to corrosion, UV rays and weather, mechanical resistance and very limited maintenance. The clear span ratio protects from jet-blast.



Find out more  
Scan for more information

## Features

Radio-transparent

Easy installation

Zero maintenance



Exploded view of post and fixing details for the CLD FibreFence Gates  
This product has additional features not demonstrated for security reasons



cld-systems.com

# CLD FibreFence Gates

GRP fibreglass gate system

## Product Technical Information

<b>Standard</b>	CE marked UNIEN 13241- class 5 wind resistance Safety Crash Gate Systems available in compliance with ICAO "Aerodrome Design Manual, Part 6, 1st ed. 2006" standards Resistance to corrosion Frangibility in compliance with ICAO standards Annex 14 Volume 1
<b>Panel Type</b>	Options to be chosen from the CLD range of mesh, railings or grating infill to match fencing. See mesh type Q40 for more information.
<b>Panel Width</b>	Various widths available to suit customer requirements. Railing infill: 1.1m, side panel 0.4m Grating infill: 1.1m, side panel 0.4m
<b>Available Heights</b>	To suit fence system
<b>Finish</b>	Railing infill: Green RAL 6010, other colours available on demand Profiles colour: Grey (RAL 7035) and Grey (RAL 7004)
<b>Post dimensions</b>	Main posts made by double GRP rectangular profiles section 85X50m, thickness 5mm
<b>Fixings</b>	Depends on mesh panel type. See relevant Q40 for details. Stainless steel rivets, bolts and nuts
<b>Foundations</b>	800m fixation into concrete
<b>Configuration</b>	Double leaf/ single leaf
<b>Gate Frame</b>	Fast/cost-effective installation, no special tools or cranes Railing: panels supplied 100% preassembled
<b>Locking</b>	To client specification. Possibility to motorize the gates. Hot-dip galvanized steel guiding rail locking latches
<b>Hinges</b>	Hot-dip galvanized steel hinges
<b>Warranty</b>	Minimum of 12 months against manufacturing defects
<b>Notes</b>	All dimensions are nominal, for further information please contact CLD Fencing Systems. Information is correct at time of production. As part of our policy of continuous improvement, we reserve the right to alter product specification without notice.

## Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD\_FibreFence\_Gates\_DS\_20230609