

CLD SlideMaster

Cantilever Sliding Gates



Physical Security Systems



Find out more
Scan for more information

Description


CLD's SlideMaster gates have been specially developed to blend in seamlessly with a CLD fence line. Available in different mesh options to match the fence, set in a heavy duty aluminium frame, SlideMaster gates are available up to 10 metres wide each. This gate is ideal for industrial, retail and car parks. The track is totally enclosed, preventing damage from vandals.

Features

Available in different mesh options to match fence line

Double or single leaf opening

Enclosed track

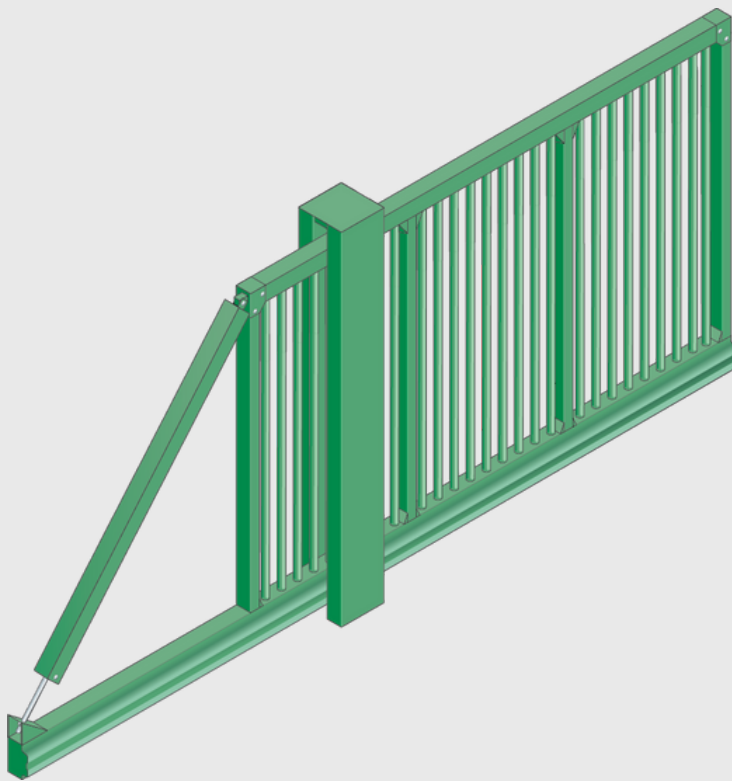

cld-systems.com


CLD SlideMaster

Cantilever Sliding Gates

Product Technical Information

Standard	BS1722-14:2017
Description	Open mesh aluminium security gate system with steel mesh infill. Manual option available.
Panel Options	Options to be chosen from the CLD range of mesh fencing panels to match fenceline.
Panel Width	Single leaf opening size from 1000mm to 10000mm Double leaf opening size from 2000mm to 20000mm
Available Heights	Range of heights to suit customer requirements.
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Post Dimensions	80mm x 80mm minimum
Fixings	Main control tower, park post and support rollers to be rawl-bolted to cast concrete footings all as per manufacturer's drawings. Setting out not to commence until site specific drawings have been issued by manufacturer.
Gate Frame	Gate consists of main aluminium upright tower to house motor and all safety equipment. Main gate frame supported on custom made cantilever beam. Frame constructed from 75x75mm Aluminium box with mesh infill as above. 230v single phase power required to power the 100% duty cycle motor with a gate opening speed of 4 seconds per metre.
Foundations	Concrete slab foundation to suit gate size. Please contact CLD Physical Security Systems.
Locking	Auto and manual locking available
Other requirements	Please allow for 60mm safety cell ducting between gate tower and park post, and main power feed to tower, as per drawing
Warranty	Gate: Minimum of 15 years against manufacturing defects. Auto-element: Minimum of 12 months.
Notes	All dimensions are nominal, for further information please contact CLD Fencing Systems. Information is correct at time of production. As part of our policy of continuous improvement, we reserve the right to alter product specification without notice.

System Details

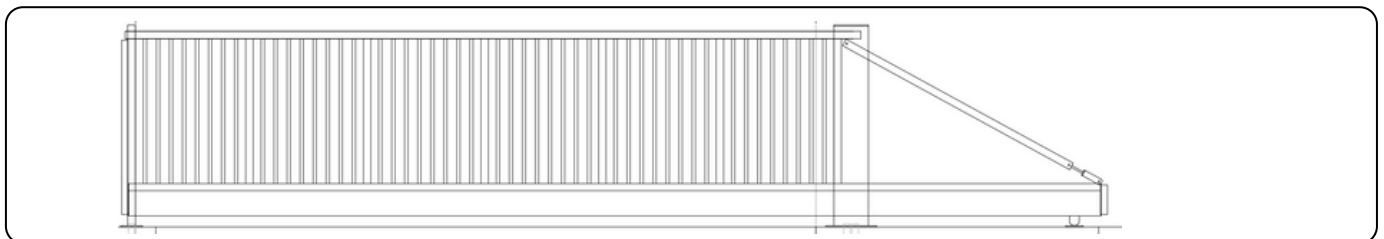

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_SlideMaster_DS_20220222