

CLD ModSec Securus S1

Modular physical security system with security fencing to LPS 1175 A1 (SR1) Issue 8



Physical Security Systems



Find out more
Scan for more information

Description

CLD ModSec is an innovative installation system which can be installed either at ground level or as a trench system. It features an in-built channel for wires or services enabling easy installation of CCTV, PIDS or other electronic devices. Modsec S1 incorporated CLD Securus S1 fence panels. Tested by the Loss Prevention Certification Board (LPCB), Securus S1 offers a minimum delay against attack of 60 seconds.


Features

Suitable for flat ground or gradients

Easily updated as threat level changes

Built in services channel

Hire or purchase

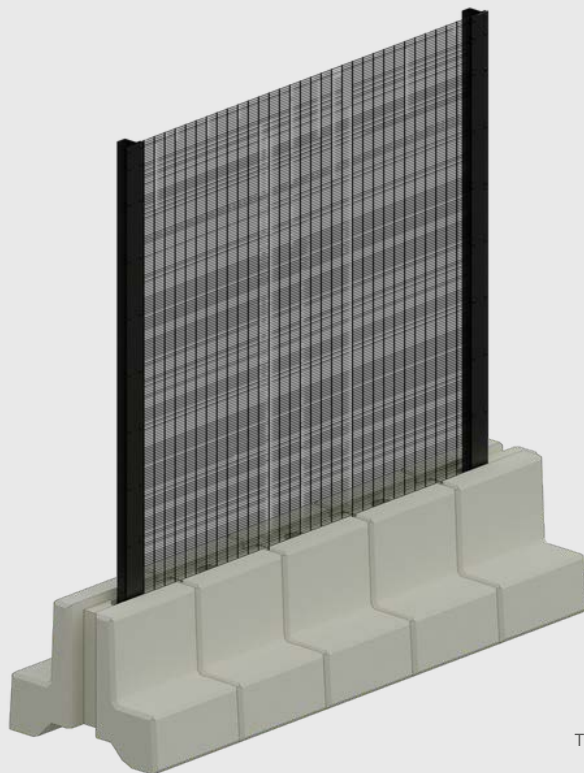

Exploded view of post and fixing details for the CLD ModSec Securus S1
This product has additional features not demonstrated for security reasons



cld-systems.com

CLD ModSec Securus S1

Modular physical security system with security fencing to LPS 1175 A1 (SR1) Issue 8



Physical
Security
Systems

Product Technical Information

Standard	LPS 1175 BS1722-14:2017 BS EN ISO 141:2009 BS EN 13438:2013 Secured By Design
Panel Type	Mesh and wire panel installed using ModSec concrete base (see separate ModSec Base Q40)
Panel Width	2520mm
Wire diameter	4mm
Mesh size	76.2 x 12.5mm
Available heights	1830mm to 5000mm
Nominal Heights	1.8m to 5m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Panel Installation	Bottom of panel maximum 50mm above block
Security Topping Options	Barbed and razor wire, cranked and straight
Post Dimensions	80mm x 60mm. Corner posts: 80mm x 80mm.
Post Centres	2520mm +/- 9mm
Posts	Special flanged post, galvanised after manufacture and polyester powder-coated to match fencing
Fixings	120mm x 6mm full length clamp bar. M8 Stainless Steel cup square bolt (min 30mm)
Foundations	Install using ModSec foundation system. Must be installed on suitable flat ground, ensuring blocks interlock and posts are installed in every fourth block. Set post into block with suitable compound depending on permanent or temporary installation.
Warranty	Minimum of 15 years against manufacturing defects.

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_ModSec_Securus_S1_DS_20230630