

CLD ModSec Dulok S1

Modular physical security system with high security fencing to LPS 1175 (SR1) Issue 8



Find out more
Scan for more information

Description

CLD Modsec Dulok S1 mounts the highly versatile mesh fencing system of Dulok S1 panels on top of the innovative installation system using the ModSec base, which can be installed either at ground level or as a trench system. This also features an in-built channel for wires or services, enabling easy installation of CCTV, PIDS or other electronic devices. This security-rated version of Dulok features twin 8mm horizontal wires either side of the 6mm vertical wire.



Features

High security anti-cut double wire panels

Secured by Design accredited system

Can be used on flat ground or gradients

Exploded view of post and fixing details for the CLD ModSec Dulok S1
This product has additional features not demonstrated for security reasons



cld-systems.com


CLD ModSec Dulok S1

Modular physical security system with high security fencing to LPS 1175 (SR1) Issue 8

Product Technical Information

Standard	BS1722-14:2017 BS EN ISO 141:2009 BS EN 13438:2013
Panel Type	Mesh and wire. Single vertical and double horizontal wires. Installed using ModSec concrete base.
Panel Width	2508mm
Wire Diameter	6mm verticals and twin 8mm horizontals.
Mesh size	200mm x 50mm
Fixings	40mm x 5mm full length clamp bar. M8 x 40mm stainless steel pin hex dome-head security screws. Sheardrive™ if required instead of pin hex.
Available Heights	1830mm up to 5070mm (Select as appropriate)
Nominal Heights	1.8 to 5m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Top Edge Projection	30mm
Panel installation	Bottom of panel maximum 50mm above block
Topping Options	Options available on request
Posts	RHS, galvanised after manufacture and polyester powder-coated to match fencing
Post Dimensions	Minimum 60mm x 40mm depending on height of panel
Post Centres	2520mm
Foundations	Install using ModSec foundation system. Must be installed on suitable flat ground, ensuring blocks interlock and posts are installed in every fourth block. Set post into block with suitable compound depending on permanent or temporary installation.
Warranty	Minimum of 15 years against manufacturing defects.

System Details

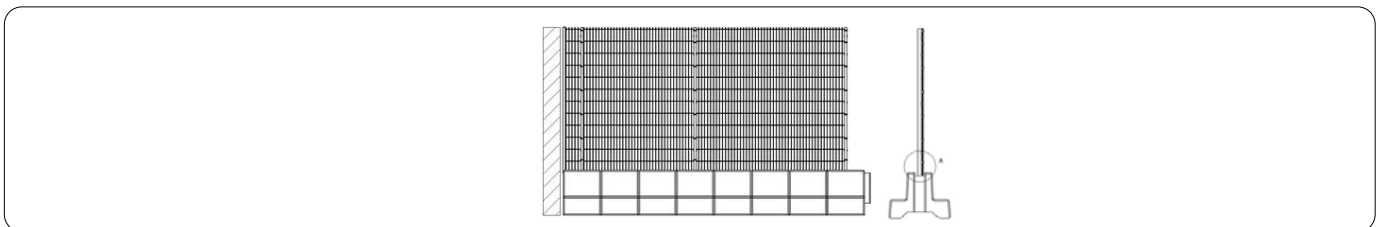

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_ModSec Dulok_S1_DS_20230315