

# CLD PedMaster Double


Double Turnstile



Find out more  
Scan for more information

## Description

CLD PedMaster turnstiles offer the best protection for site entry and exit. They help to prevent piggybacking and tailgating attempts at such a reliable level that no guard supervision is necessary. Manufactured to the exact same standards as a permanent turnstile, and are suitable for controlling access in environments such as reception areas, schools, public buildings and military bases. CLD Fencing Systems offers bi-directional or single direction operation allowing you to determine how they are used within your overall fence line. The turnstiles are constructed from mild or stainless steel for long lasting, maintenance free performance, supplied as unites ready to bolt down and commission.

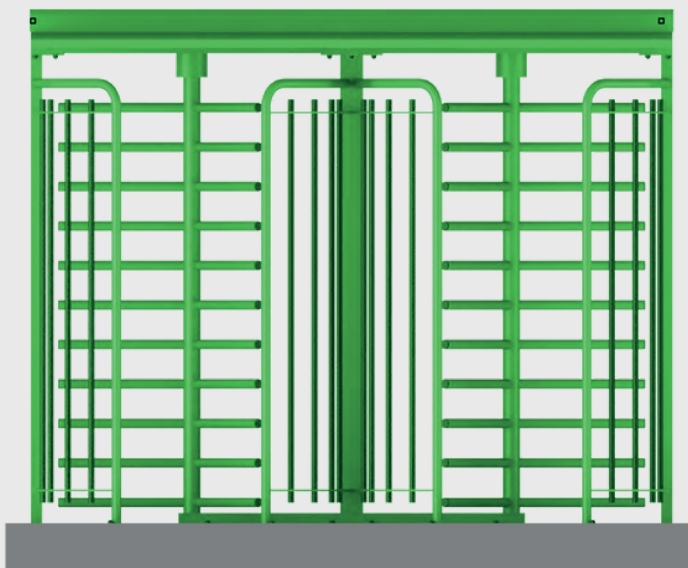

## Features

All RAL colours available

Force tested to 1200 Newtons

Bi-directional or single direction only

Exploded view of post and fixing details for the CLD PedMaster Double. This product has additional features not demonstrated for security reasons



# CLD PedMaster Double

Double Turnstile

## Product Technical Information

**Standard** Casing; IP55  
CE Approved Force tested to 1200 Newtons  
BS EN 1991  
BS1722-14:2017

**Arm Diameter** 42mm tube with capped ends

**Dimensions** 2780mm x 1400mm x 1790mm

**Rotor** 76mm tube with bottom supported bearing

**Side frames** 33mm tube with welded to curve base plate

**Finish** Polyester powder-coated to minimum 80 microns.  
Any RAL colour. LED courtesy down light/passage indicators

**Unit weight** 230kg

**Features**

- Ease of installation
- Low maintenance
- 99.9% Access Control Compat
- Reader Plates Fitted as STD
- Fire alarm input pre-configured
- Paxton/Nortech/levo compat
- Easy to use for end users
- Pedestrian rain canopies
- Stainless steel rotors/frames
- Different heights available
- Bespoke size reader plates
- Heel guards
- Pedestrian gate combination

**Warranty** Minimum of 12 months against manufacturing defects.

**System Details**

- 00% duty cycle heavy industrial usage. Single phase supply.
- Plug & play installation.
- Programmable control panel c/w fault diagnostic on screen display.
- Fire alarm input built in as standard (engages free rotation).
- High specification turnstile to control schools/arenas and unauthorised access to secure areas.
- 90° or 120° rotor assemblies available.
- Fail safe or fail secure modes in the event of power failure

## Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD\_PedMaster\_Double\_20230413