

CLD SportsRail

Hand railing system




Physical Security Systems



Find out more
Scan for more information

Description

When hosting any spectator sport, you should always have an appropriate barrier between the crowd and the field of play. Our incredibly popular SportsRail™ fencing creates a safe perimeter around the action, while giving spectators a strong and comfortable rail to lean on. Versatile and attractive enough to be installed in school playgrounds and around running tracks, Sports Rail™ is incredibly simple to install thanks to its quick and easy clamp system. The system is available with kickboards to prevent ball damage, and a range of panels from flat, profiled and the Dulok double wire system with RHS posts to solid panels which enable corporate advertising boards. This is also available in a bespoke Velodrome fencing solution that has been specified by British Cycling and is featured on a wealth of velodromes.

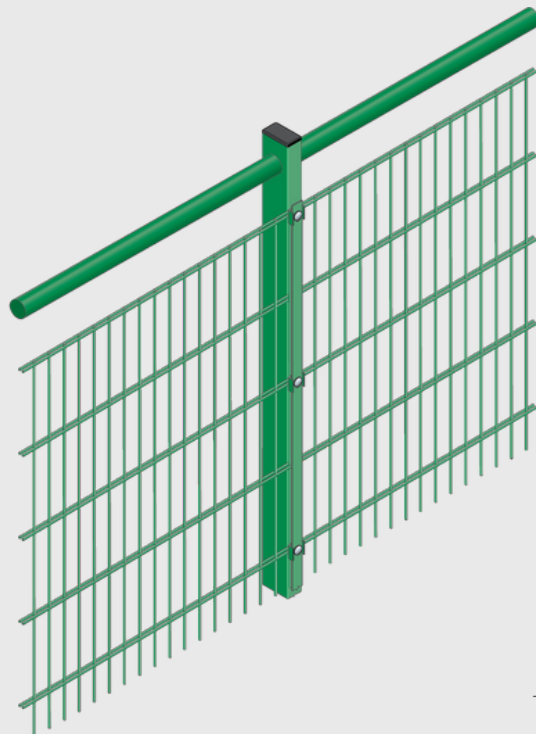

Features

CHS or SHS posts available

CHS or SHS top rails available

Excellent for corporate advertising

Quick and easy clamp system

Exploded view of post and fixing details for the CLD SportsRail
This product has additional features not demonstrated for security reasons



cld-systems.com


CLD SportsRail

Hand railing system

Product Technical Information

Standard	BS1722-14:2017
Panel Type	Choice of Dulok, Securus or Exempla infill. Single/twin top rail available
Panel Width	Dependant on infill choice.
Wire Diameter	Wire diameter dependant on infill choice. Tube diameter - 48.6mm or 60.3mm
Mesh size	Dependant on infill choice.
Fixings	Security fixings to suit application.
Available Heights	900mm to 1390mm
Nominal Heights	0.9m to 1.39m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Top Edge Projection	Nil
Panel installation	Bottom of panel approx 40mm above ground
Posts	SHS or CHS dependant on application with CHS top rail, galvanised after manufacture and polyester powder-coated to match fencing.
Post Dimensions	Dependant on application
Post Centres	2520mm
Foundations	Set posts in holes 300mm diameter and 800mm deep min. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions
Warranty	Minimum of 15 years against manufacturing defects.

System Details

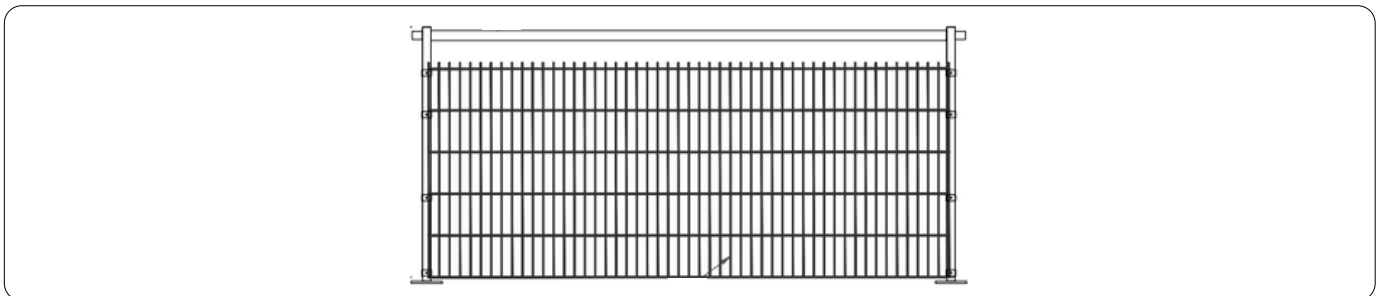

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_SportsRail_20230413