

CLD ModSec Securus S3

Modular physical security system with security fencing to LPS 1175 C5 (SR3) Issue 8



Physical Security Systems



Find out more
Scan for more information

Description

CLD ModSec is an innovative installation system which can be installed either at ground level or as a trench system. It features an in-built channel for wires or services enabling easy installation of CCTV, PIDS or other electronic devices. Modsec S3 incorporated CLD Securus S3 fence panels. Tested by the Loss Prevention Certification Board (LPCB), Securus S3 offers a minimum delay against attack of 5 minutes seconds. This system is ideal for Data Centres, Police Stations & High secure units, Utilities, MoD and Government establishments


Features

Suitable for flat ground or gradients

Built in services channel

Easily updated as threat level changes

Hire or purchase

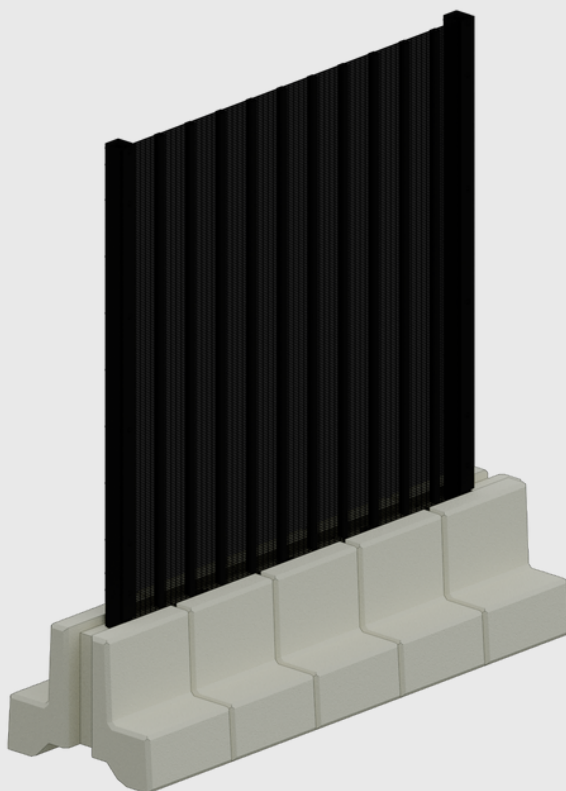

Exploded view of post and fixing details for the CLD ModSec Securus S3
This product has additional features not demonstrated for security reasons



cld-systems.com

CLD ModSec Securus S3

Modular physical security system with security fencing to LPS 1175 C5 (SR3) Issue 8



Physical
Security
Systems

Product Technical Information

Standard	LPS 1175 BS1722-14:2017 BS EN ISO 141:2009 BS EN 13438:2013 Secured By Design
Panel Type	Mesh and wire. Double layered mesh cassette system. High aluminium content. (Note: Fence Cassettes are supplied assembled for ease of install, mechanical lifting required – can be supplied unassembled)
Panel Width	2520mm
Wire diameter	4mm
Mesh size	76.2 x 12.5mm
Available heights	2440mm to 5000mm
Nominal Heights	2.4m to 5.0m
Finish	Polyester powder-coated to 60-80 microns or 160-200 microns with marine grade and metallics. Any RAL colour available
Panel Installation	Bottom of panel maximum 50mm above block
Security Topping Options	Barbed and razor wire, cranked and straight
Post Dimensions	100mm x 100mm
Post Centres	2520mm
Posts	SHS, galvanised after manufacture and polyester powder-coated to match fencing
Fixings	100mm x 5mm full length clamp bar. M8 Stainless Steel cup square bolt (min 100mm) and SafeTFix™ nut
Foundations	Install Modsec foundation on suitable flat ground making sure blocks interlock and posts are installed in every fourth block. Set post into block with suitable compound depending on permanent or temporary installation.
Warranty	Minimum of 15 years against manufacturing defects.

System Details



Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_ModSec_Securus_S3_DS_20230630